


PART NUMBER



ZL-D0-CBL24-2P
Made in China

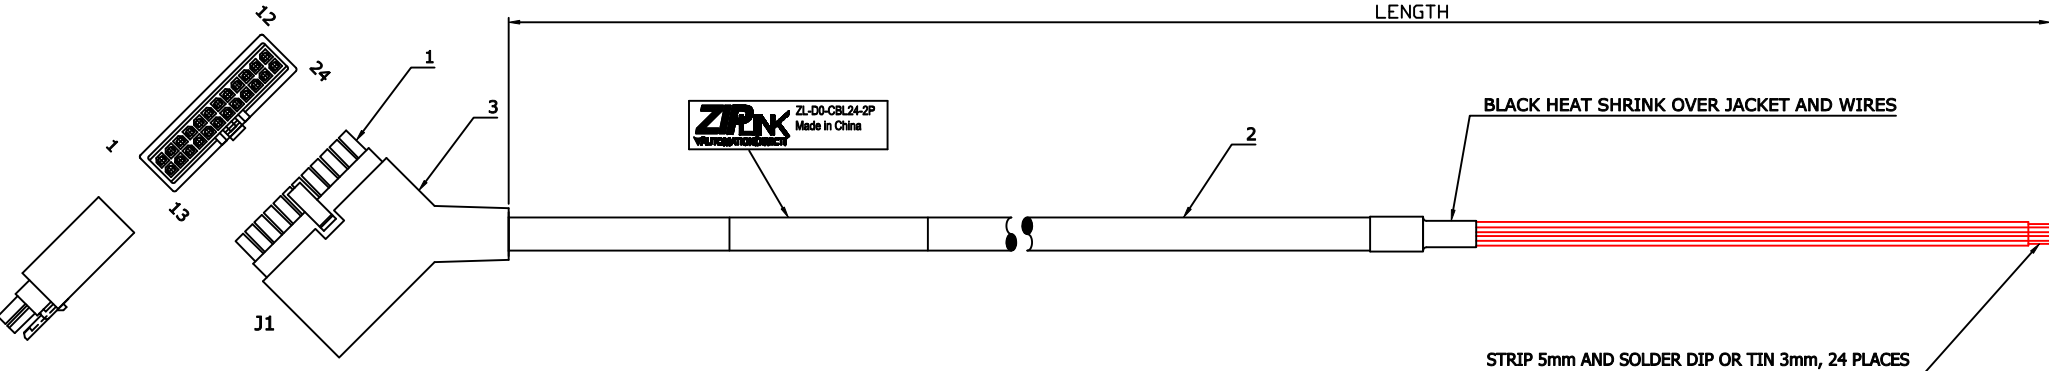

STRIP 5mm AND SOLDER DIP OR TIN 3mm, 24 PLACES

SPECIFICATIONS:

1. WITHSTANDING VOLTAGE:
1530 VAC FOR 1 MINUTE OR 1836 VAC FOR 1 SECOND
2. MAXIMUM WORKING VOLTAGE = 265V AC/DC
MAXIMUM OPERATING VOLTAGE = 240V AC/DC
3. MAXIMUM OPERATING CURRENT = 40A PER CABLE
RATED 2A PER CONDUCTOR, 0-60°C OPERATING RANGE
4. MINIMUM BEND RADIUS 2.6 [66]
5. CABLE DIAMETER .32 [8.2]

MATERIAL:

1. ALEX 3025-24 PIN .118" DUAL ROW RECEPTACLE HOUSING FOR 3030T2 TIN-PLATED CRIMP TERMINALS OR MOLEX MICRO-FIT 3.0 24 PIN RECEPTACLE 43025-2400.
2. UL2464 24 AWG BLACK JACKET CABLE, 24 CONDUCTORS, 300V, 80°C
3. 45P PVC, BLACK COLOR OVER-MOLD

J1 PIN	WIRE COLOR
1	BLACK
13	BLACK/WHITE
2	BROWN
14	BROWN/WHITE
3	RED
15	RED/WHITE
4	ORANGE
16	ORANGE/WHITE
5	GREEN
17	GREEN/WHITE
6	PURPLE
18	PURPLE/WHITE
7	YELLOW
19	YELLOW/BLACK
8	GRAY
20	GRAY/BLACK
9	LIGHT GREEN
21	GREEN/BLACK
10	LIGHT BLUE
22	WHITE
11	PINK
23	RED/BLACK
12	BLUE
24	ORANGE/BLACK

PART NO.	LENGTH
ZL-D0-CBL24-1P	3.3' (1.0M)
ZL-D0-CBL24-2P	6.6' (2.0M)

ZL-D0-CBL24-nP

Units: inches [mm]
 Full Scale
 () denotes # of similar objects
 ∅ denotes diameter