


PART NUMBER

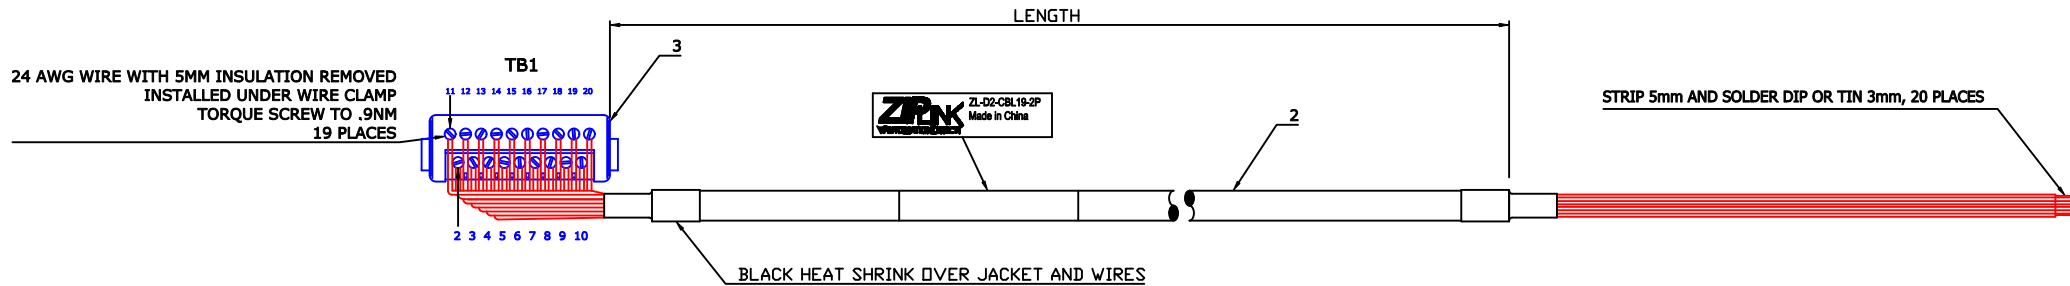

TB1 POSITION	WIRE COLOR
	BLACK = CUT BACK TO JACKET BOTH ENDS BEFORE HEAT SHRINK IS APPLIED
11	BLACK/WHITE
2	BROWN
12	BROWN/WHITE
3	RED
13	RED/WHITE
4	ORANGE
14	ORANGE/WHITE
5	GREEN
15	GREEN/WHITE
6	PURPLE
16	PURPLE/WHITE
7	YELLOW
17	YELLOW/BLACK
8	GRAY
18	GRAY/BLACK
9	LIGHT GREEN
19	GREEN/BLACK
10	LIGHT BLUE
20	WHITE
	PINK = CUT BACK TO JACKET BOTH ENDS BEFORE HEAT SHRINK IS APPLIED
	RED/BLACK = CUT BACK TO JACKET BOTH ENDS BEFORE HEAT SHRINK IS APPLIED
	BLUE = CUT BACK TO JACKET BOTH ENDS BEFORE HEAT SHRINK IS APPLIED
	ORANGE/BLACK = CUT BACK TO JACKET BOTH ENDS BEFORE HEAT SHRINK IS APPLIED

- SPECIFICATIONS:**
1. WITHSTANDING VOLTAGE:
500 VAC FOR 1 MINUTE OR 600 VAC FOR 1 SECOND
 2. MAXIMUM WORKING VOLTAGE = 265V AC/DC
 3. MAXIMUM OPERATING CURRENT = 40A PER CABLE
RATED 2A PER CONDUCTOR
 4. MINIMUM BEND RADIUS 2.6 [66]
 5. CABLE DIAMETER .32 [8.2]

- MATERIAL:**
1. UL2464 24 AWG BLACK JACKET CABLE, 24 CONDUCTORS, 300V, 80°C
 2. KOYO 19 POSITION TERMINAL BLOCK, 14013307

PART NO.	LENGTH
ZL-D2-CBL19-1P	3.3' (1.0M)
ZL-D2-CBL19-2P	6.6' (2.0M)

ZL-D2-CBL19-nP

Units: inches [mm]
Full Scale
() denotes # of similar objects
Ø denotes diameter

AUTOMATIONDIRECT.com