


22mm Pilot Devices

Audible annunciator

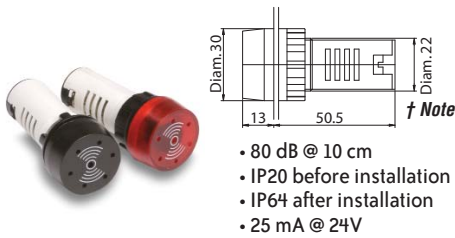

Part Number	Description	Color
ECX2070-24	22 mm, 25 mA audible (80dB at 10 cm) buzzer annunciator. 24VAC/DC	Black
ECX2070-127	22 mm, 25 mA audible (80dB at 10 cm) buzzer annunciator. 120VAC/DC	Black
ECX2071-24R	22 mm, 25 mA audible (80dB at 10 cm) buzzer annunciator with non-replaceable LED indicator. 24VAC/DC	Red
ECX2071-127R	22 mm, 25 mA audible (80dB at 10 cm) buzzer annunciator with non-replaceable LED indicator. 120VAC/DC	Red

22 mm potentiometer



Part Number	Description	Quantity
ECX2300-5K	22 mm potentiometer with 5k Ω resistance, $\pm 10\%$. Nominal voltage: 250V. Rated dissipation: 2W at 25°C. Temperature range -40°C to 70°C. Black handle	pkg. of 1
ECX2300-10K	22 mm potentiometer with 10k Ω resistance, $\pm 10\%$. Nominal voltage: 250V. Rated dissipation: 2W at 25°C. Temperature range -40°C to 70°C. Black handle	pkg. of 1
ECX2640	22 mm legend plate for potentiometer with 0% to 100% marking	pkg. of 1

22 mm Pilot Device Accessories

Replacement incandescent bulbs



Part Number	Rating	Description	Quantity
ECX1900-5	6V, 1.2 watts	6V replacement bulb for 22 mm metal and C-H switches and indicators. Miniature bayonet base T31/4	pkg. of 5 bulbs
ECX1902-5	24V@ 80mA 2 watts	24V replacement bulb for 22 mm metal and C-H switches and indicators. Miniature bayonet base T31/4	pkg. of 5 bulbs
ECX1904-5	130V@20mA 2.6 watts	120V replacement bulb for 22 mm metal and C-H switches and indicators. Miniature bayonet base T31/4	pkg. of 5 bulbs

Note: Bulb removal tool available. Order part number HT8LAMPTOOL.

Replacement LED bulbs



Part Number	Color	Rating	Description	Quantity
ECX1911-2	Red	24V@26mA 0.6 watts	LED replacement lamp for miniature bayonet bases Works with 22 mm metal and Cutler-Hammer switches and indicators, but illumination will not be as even when used with 22mm indicators	pkg. of 2 LED lamps
ECX1912-2	Green			
ECX1913-2	Yellow			
ECX1914-2	Blue			
ECX1915-2	White	120V@5mA 0.6 watts	Note: Will not replace sealed C-H monoblock LED indicators.	
ECX1921-2	Red			
ECX1922-2	Green			
ECX1923-2	Yellow			
ECX1924-2	Blue			
ECX1925-2	White			

Note: LED modules have very low current draw and should not be used with triac output devices like PLC triac output modules. It is recommended that dry contact outputs be used to switch 120 volt AC modules.

Hole plug



Part Number	Description	Color
ECX1490	Plastic hole plug for 22.5mm openings in panels and enclosures; supplied with O-ring and mounting screw. Two plugs per package.	Black

† Note: All dimensions are in millimeters. 25.4mm = 1 inch.
 For example, 30 mm in inches = 30/25.4 = 1.181 inches.