



# Pneumatic Union Stop Valve


## Union Stop Valve

NITRA Pneumatic Push-to-Connect union straight stop valve bodies are made of a strong thermoplastic (PBT) and have stainless steel tube gripping claws. When the downstream tube is removed from the stop valve, upstream air pressure is blocked. NITRA Polyurethane and Nylon 12 tubing is easily connected by simply inserting the tubing end into the fitting. To release the tubing, press the circular release ring and the tubing can be easily pulled out.

### Features:

- Inch and metric sizes available
- Tough thermoplastic bodies and stainless steel tube gripping claws
- Release rings are color coded to differentiate between inch and metric sizes
- When the downstream tube is removed from the stop valve, upstream air pressure is blocked.

NITRA pneumatic push-to-connect union straight manual hand valve with thermoplastic (PBT) body and stainless steel tube gripping claws. When the downstream tube is removed from the stop valve, upstream air pressure is blocked. For use with polyurethane or nylon tubing. Five fittings per package.

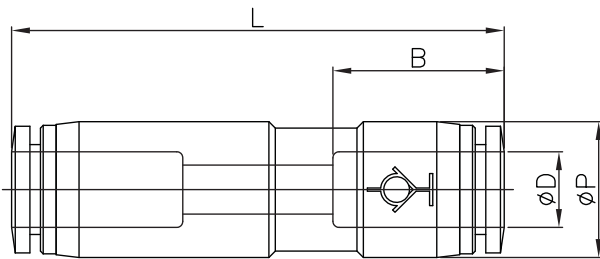

Inch Fitting



Metric Fitting

NITRA™ Union Stop Valve								
Inch Sizes - dimensions in inches (in.)								
Part No.	Price	Size	øD	øP	L	B	Package Weight (lbs)	Qty. per pack
SVU532	<--->	5/32 in. [4 mm]	5/32	0.41	1.66	0.59	0.1	5
SVU14	<--->	1/4 in.	1/4	0.51	1.85	0.66	0.1	5
SVU38	<--->	3/8 in.	3/8	0.69	2.29	0.79	0.2	5
SVU12	<--->	1/2 in.	1/2	0.83	2.67	0.90	0.4	5
Metric Sizes - dimensions in millimeters (mm)								
SVU6M	<--->	6 mm	6	12.5	46.0	16.4	0.1	5
SVU8M	<--->	8 mm	8	14.8	53.7	18.7	0.1	5
SVU10M	<--->	10 mm	10	17.5	58.2	20.1	0.2	5
SVU12M	<--->	12 mm	12	20.5	67.1	22.8	0.3	5

