


**Description:**

Shielded cable to connect MT6050i or MT8050i HMI to D4-430/440/450 cpu port 1, D2-DCM or D4-DCM.



PLC (25-pin 'D' plug)



Pin	Description	Note
2	TX	
3	RX	
4	RTS	link to 5
5	CTS	link to 4
7	Sig GND	

HMI (DB9-S)  
D-Shell

PLC (DB25-P)

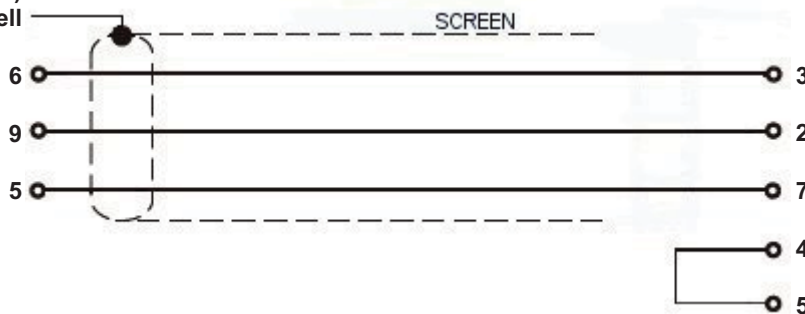

Pin	Description	Note
9	RX	COM 1
6	TX	COM 1
5	Sig GND	

Connect screen to D-shell  
THIS END ONLY.

HMI (9-pin D socket)

**Abbreviations:**

DB9-S is a 9-pin 'D' type socket connector (female), DB25-P is a 25-pin 'D' type plug connector (male)

**Notes:**

- RS232 cables may be extended to 50m if the baud rate is reduced to 9600 or less. Use low capacitance cable (2.5nf max)
- RS232 cables should not be cut and taken through terminals.
- When building your own cables we recommend you use a 4-core, 24 or 22 AWG stranded shielded cable.
- The EMC and Machinery Directives recommend that for reliable operation of serial data connected equipment the common terminal of each power supply within a control cubicle should be grounded to the safety STAR earth point, and that separate substantial equi-potential earth wires should be run alongside screened cables to interlink earth points of control cubicles to eliminate fault currents between devices. This equates to a 4mm<sup>2</sup> minimum (10mm<sup>2</sup> preferred) earth wire being run between the star earth point connected to the power supply common (0v) of HMI and all PLC devices, powered USB devices, and equipment with Ethernet ports.

REV.	DESCRIPTION	DATE	BY	CHKD	Lamonde Automation own the copyright of this drawing which is supplied in confidence and which must not be re-produced or used for any purpose other than for which it is supplied

<b>Title: MT6050i/8050i HMI cable to DirectLOGIC 25-pin D socket connector ports - 2m length (RS232)</b>	<b>DRAWN BY</b>	<b>MLD</b>
	<b>DATE</b>	<b>19/10/2008</b>
	<b>SCALE</b>	<b>not to scale</b>

<b>Lamonde Automation Ltd.</b> Project House, Morris Road, South Nutfield, Surrey. RH1 5SA Tel: 01737 824600	<b>Part Number:</b> <b>MT50CBL-KOYO-4</b>
---	--